
S CONTRACT LIFTING SERVICES

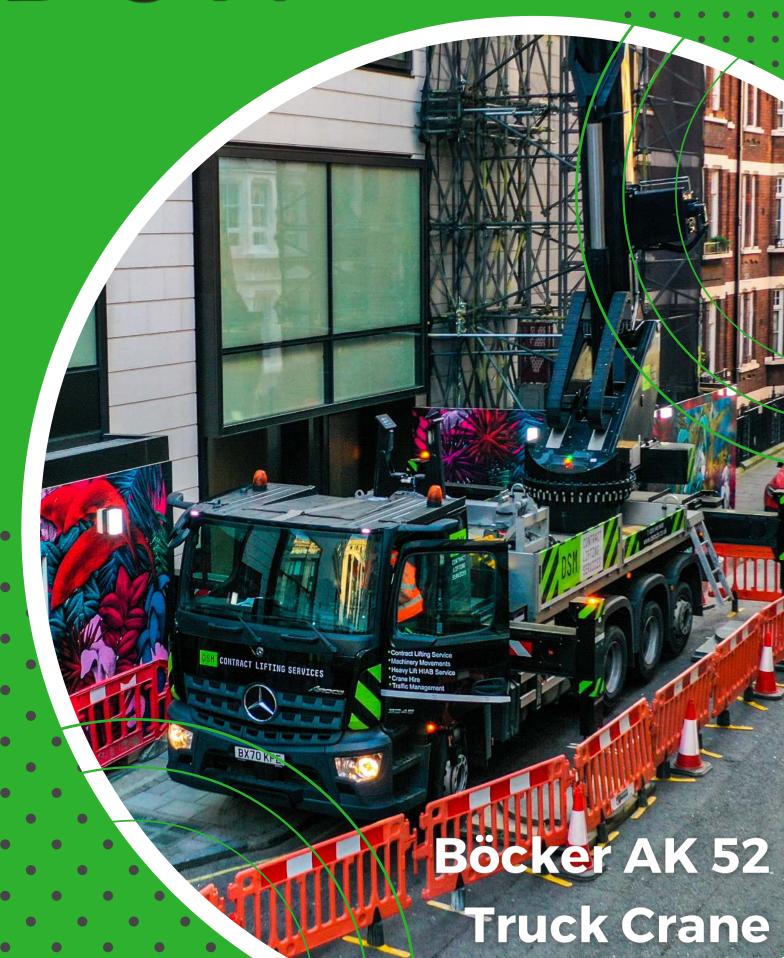

TECHNICAL INFORMATION

BÖCKER AK 52 TRUCK CRANE

With a maximum load of up to 12 tonnes, the Böcker AK 52 crane provides customers with a strong combination of performance, enormous working ranges and fantastic efficiency. This is the most powerful crane in the Böcker Range and can often make easy work of jobs which were previously reserved for much larger all-terrain cranes, more often than not they will need an additional jib extension and offset to come close!

The crane can be rigged with each outrigger set at an infinite variety of lengths giving the end-user great flexibility in rigging situations on-site. The minimal tail swing allows the crane to rig and work in previously impossible situations.

This type of machine offers very low outrigger loadings in comparison with conventional all-terrain and truck-mounted cranes with comparable boom lengths.

The operator can always have the best vantage point to safely operate the crane due to the flexibility of the fact it is operated remotely, by remote control which can minimise the risk of blind lifting operations.




This crane will lift a maximum load of 12 tonnes with a 5m radius and an impressive maximum radius of 45 meters with 100 kg or 34 m with 1,000 kg load. The Böcker 52 is equally impressive with an extremely large working area.

Payload max. (kg)	12,000
Extension length max. (m)	55m
Mechanical extension length	38.00
Jib extendible (m)	6.3 / 10.3 / 14.3
Jib payload (kg)	3,000 / 2,000 / 1,000
Main boom angle (degrees)	85
Swivel range (degrees)	+/- 310
Jib angle approx. (degrees)	157
Lifting speed (m/min)	50
Support area L x W max. (m)	6.89 x 6.4
Support area L x W to one side (m)	4.73
Standard Outrigger Pads	800mm x 800mm






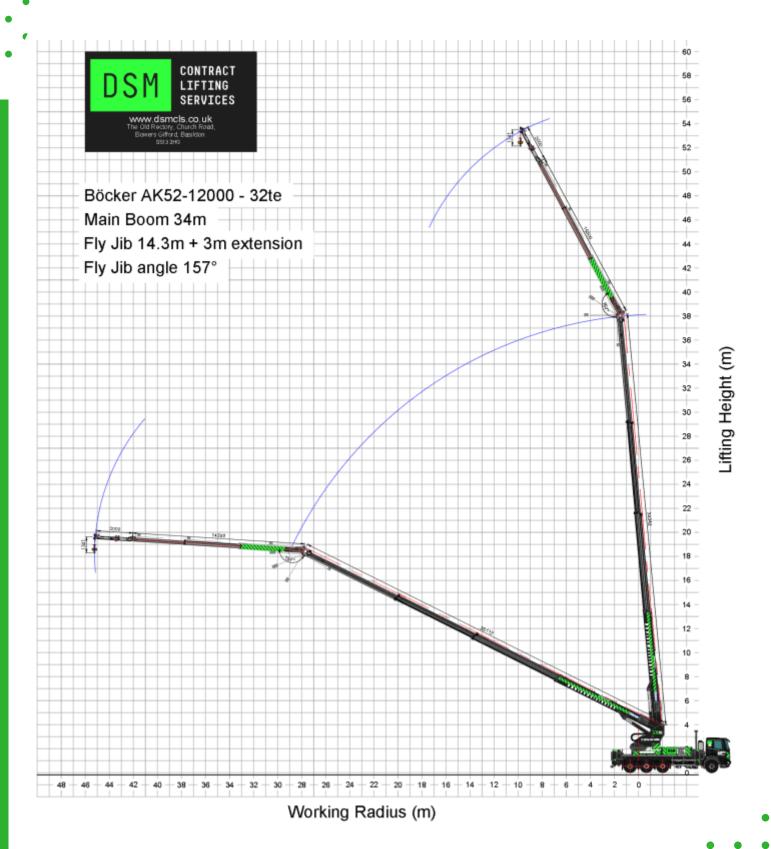







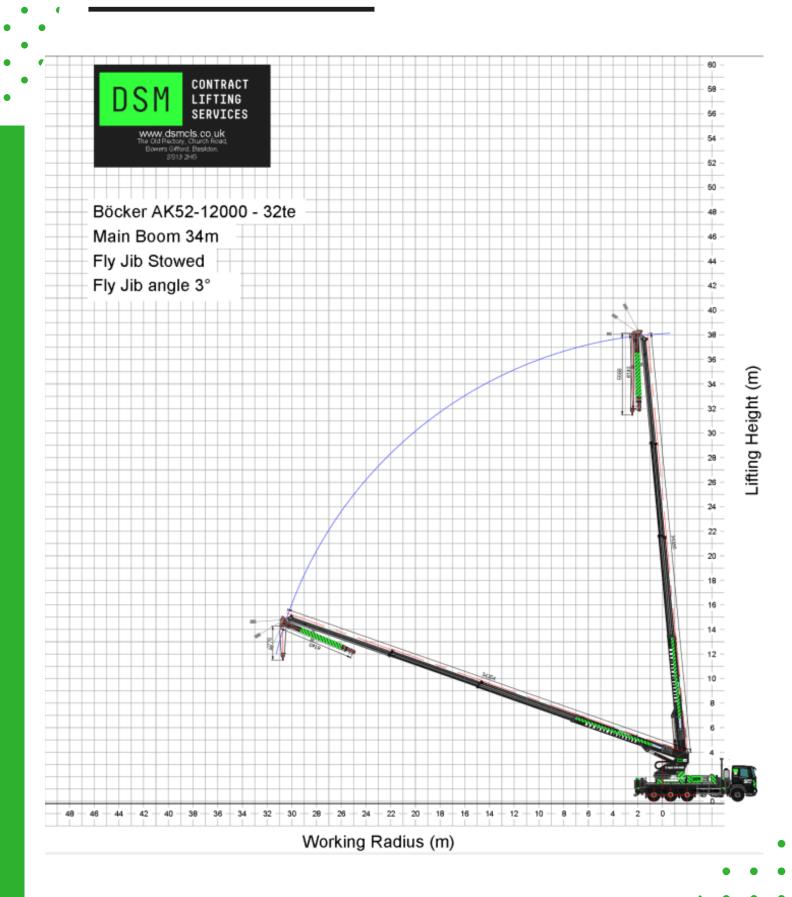

DIMENSIONS

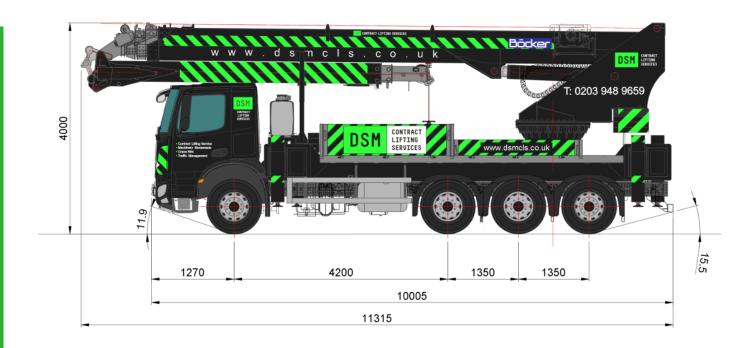

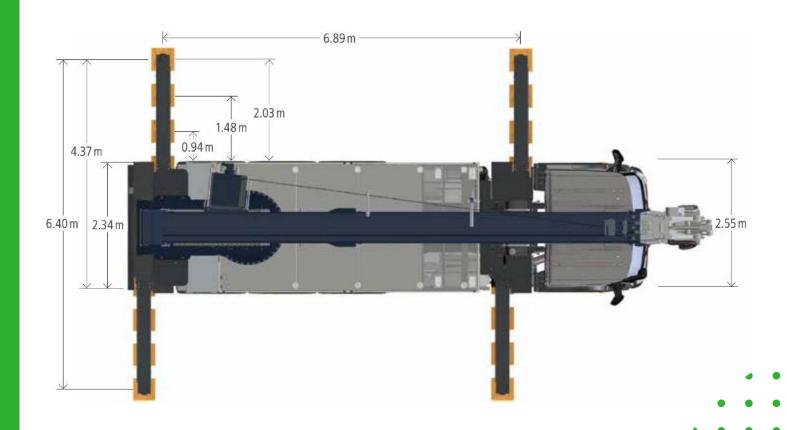

Böcker AK 52

